

Flexibles USB 2.0 Kabelmaterial mit nur 3mm Durchmesser, 100m Rolle

Artikelnummer ART-R100
Länge 100000mm




Produktbeschreibung

Flexibles USB 2.0 Kabelmaterial mit 3mm Durchmesser, 100m Rolle, USB 2.0 kompatibel, Farbe: schwarz

Technische Daten

- Extra dünnes USB 2.0 Kabelmaterial (Rolle ohne Stecker)
- Kabelrolle Länge 100m
- Kabel-Durchmesser nur ca. Ø 3mm
- daher sehr flexibel
- High End UL Kabelmaterial vom Hersteller COPARTNER
- E119932 AWM 2725 80°C 30V VW-1 COPARTNER
- Aderstärken: 28AWG/2C + 30AWG/1P (Kupfer)
- Datenadern paarig verdrillt (twisted pair)
- USB 2.0 kompatibel + abwärtskompatibel zu USB 1.1
- geeignet für 480 Mbps (high speed), 12 Mbps (full speed) und 1,5 Mbps (low speed)
- RoHS-konform
- Farbe: halb matt schwarz

Weitere Bilder

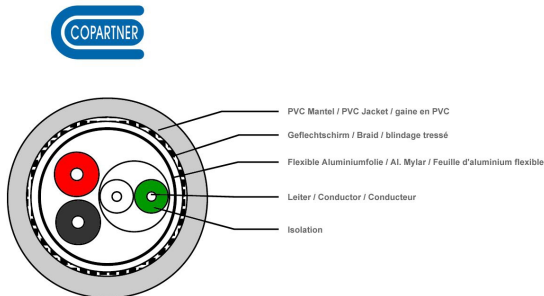

100m



SPECIFICATION: | 1P*30AWG +2C*28AWG+AL_Mylar +Braid


ITEM	SPECIFICATION		
CONDUCTOR	AWG	30AWG	28AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND.SIZE	7.0.10 ± 0.008mm	7.0.127 ± 0.008mm
INSULATION	MIN.AVG.THICK	0.15mm	0.10mm
	MATERIAL	HD-PE	SB-PVC LOW TOXIC
	O. D	0.66 ± 0.05mm	0.60 ± 0.05mm
DRAIN	N.O	1P	2C
	AWG		
	MATERIAL		
Face Outside	SIZE		
	COVERAGE		100%
AL.MYLAR	OVERLAP		25% MIN
BRAID	MATERIAL		TINNED COPPER
	SIZE		16 *4/0.10± 0.008mm
JACKET	MIN.AVG.THICK		0.23mm
	MATERIAL		HALF MATT PVC
	COLOUR		UL813 BLACK
	O. D		3.00 ± 0.15 mm

- ELECTRICAL CHARACTERISTICS**
- Rating : TEMP 80°C; VOLTAGE 30V
 - Conductor Resistance: at 20°C MAX
30AWG 376.96Ω/km ;28AWG 237.25Ω/km
 - Insulation Resistance: 10MΩ·km min at 20°C de 500V
 - Dielectric Strength: AC 500V/1minute

COLOUR CODE:
2C*28AWG: 1. RED 2. BLACK
1P*30AWG: GREEN*WHITE

E119932 AWM 2725 80 30V VW-1 COPARTNER

- PHYSICAL PROPERTIES OF JACKET**
- Flexibility test: NO CRACKING
 - Flame test: PASS VW-1



© COPARTNER WIRE & CABLE (SHENZHEN) MFG CO., LTD.



